


PTO
(4/99)
1-888-3
MERCE
number
09/00513
09/15/00

PTO/SB/50 (4/98)
Approved for use through 9/30/2000. OMB 0651-0035
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Respond to a collection of information unless it displays a valid OMB control number.

REISSUE PATENT APPLICATION TRANSMITTAL

Address to: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	Attorney Docket No.	P56169RE
	First Named Inventor	KI-BONG YUN
	Original Patent Number	5,808,982
	Original Patent Issue Date (Month/Day/Year)	09/15/1998
	Express Mail Label No.	
1. <input checked="" type="checkbox"/> APPLICATION FOR REISSUE OF: (check applicable box) <input checked="" type="checkbox"/> Utility Patent <input type="checkbox"/> Design Patent <input type="checkbox"/> Plant Patent		
APPLICATION ELEMENTS		ACCOMPANYING APPLICATION PARTS
1. <input checked="" type="checkbox"/> *Fee Transmittal Form (PTO/SB/56) (Submit an original, and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification and Claims (amended, if appropriate) 3. <input checked="" type="checkbox"/> Drawing(s) (proposed amendments, if appropriate) 4. <input checked="" type="checkbox"/> Reissue Oath/Declaration (original or copy) (37 C.F.R. §1.175) (PTO/SB/51 or 52) 5. <input checked="" type="checkbox"/> Original U.S. Patent <input checked="" type="checkbox"/> Offer to Surrender Original Patent (37 C.F.R. §1.178) (PTO/SB/53 or PTO/SB/54) <input type="checkbox"/> Ribbioned Original Patent Grant <input type="checkbox"/> Affidavit/Declaration of Loss (PTO/SB/55) 6. <input checked="" type="checkbox"/> Original U.S. Patent currently assigned? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No (If Yes, check applicable box(es)) <input checked="" type="checkbox"/> Written Consent of all Assignees (PTO/SB/53 or 54) <input checked="" type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney		7. <input type="checkbox"/> Foreign Priority Claim (35 U.S.C. 119) (If applicable) 8. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS) PTO/1449 <input checked="" type="checkbox"/> Copies of IDS Citations (fifteen references) 9. <input type="checkbox"/> English Translation of Reissue Oath/Declaration (If applicable) 10. <input type="checkbox"/> *Small Entity Statement(s) (PTO/SB/09-12) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input checked="" type="checkbox"/> Other: <u>Request for Approval of Drawing Change(s)</u> <u>Check #37363 in the amount of \$948.00</u> _____ _____
NOTE FOR ITEMS 1&10: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. §1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. §1.28)		

14. CORRESPONDENCE ADDRESS							
<input type="checkbox"/> <i>Customer Number or Bar Code Label</i>		(Insert Customer No. Or Attach bar code label here)			<i>or</i> <input checked="" type="checkbox"/> <i>Correspondence address below</i>		
<i>Name</i>		ROBERT E. BUSHNELL and Law Firm					
<i>Address</i>		1522 K Street, N.W., Suite 300					
<i>City</i>		Washington		<i>State</i>		D.C.	
				<i>Zip Code</i>		20005-1202	
<i>Country</i>		U.S.A.		<i>Telephone</i>		(202) 408-9040	
				<i>Fax</i>		(202) 628-0755	

NAME (Print/Type)	Robert E. Bushnell	Registration No. (Attorney Agent)	27,774
Signature		Date	15 September 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent & Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



09/15/00

Approved for use through 9/30/00. OMB 0651-0083
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

A/RE

PTO/SB/56 (02-83)

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

09/15/00

REISSUE APPLICATION FEE TRANSMITTAL FORM

Docket Number (Optional)

P56169RE

Claims as Filed - Part 1

Claims in Patent	For	Number filed in Reissue Application	(3) Number Extra	Small Entity		Other than a Small Entity	
				Rate	Fee	Rate	Fee
(A) 17	Total Claims (37 CFR 1.16(j))	(B) 30	**** 20 =	×\$ ____ =	or	×\$18.00 =	180.00
(C) 2	Independent Claims (37 CFR 1.16(i))	(D) 4	* 1 =	×\$ ____ =		×\$78.00 =	78.00
Basic Fee (37 CFR 1.16(h))						\$ ____	\$ 690.00
Total Filing Fee						\$ ____	\$ 948.00

Claims as Filed - Part 2

	(1) Claims Remaining After Amendment		(2) Highest Number Previously Paid For	(3) Extra Claims Present	Small Entity		Other than a Small Entity	
					Rate	Fee	Rate	Fee
Total Claims (37 CFR 1.16(j))	***	MINUS	**	*	×\$ ____ =	or	×\$ ____ =	
Independent (37 CFR 1.16(i))	***	MINUS	*****	0	×\$ ____ =		×\$ ____ =	
Total Additional Fee						\$	OR	\$

* If the entity in (D) is less than the entity in (C), Write "0" in column 3.

** If the "Highest Number of Total Claims Previously Paid For" is less than 20, Write "20" in this space.

*** After any cancellation of claims.

**** If "A" is greater than 20, use (B-A); if "A" is 20 or less, use (B-20).

***** "Highest Number of Independent Claims Previously Paid For" or Number of Independent Claims in Patent (C).

☐ Please charge Deposit Account No. _____ In the amount of _____.

A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any additional fees under 37 CFR 1.16 or 1.17 which may be required, or credit any overpayment to Deposit Account No. 02-4943.

A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$ 948.00 to cover the filing/additional fee is enclosed.

15 September 2000

Date

Signature of Applicant, Attorney or Agent of Record

Robert E. Bushnell

Typed or printed name

1

**DISK CALIBRATION AND SEARCH
METHOD IN A CD-ROM DRIVE SYSTEM**

**CROSS REFERENCE TO RELATED
APPLICATIONS**

This application makes reference to, incorporates the same herein, and claims all benefits accruing under 35 U.S.C §119 from an application entitled Disk Calibration Method In CD-ROM Drive System earlier filed in the Korean Industrial Property Office on 13 May 1995, and there duly assigned Serial No. 95-11815 by that Office.

BACKGROUND OF THE INVENTION

The present invention relates to a disk drive such as a compact disk, and more particularly, to a disk calibration and search method for a compact disk read only memory (i.e., a CD-ROM) disk drive, for increasing the setting accuracy of the number of disk tracks when a pickup searches the disk tracks in the disk drive.

As currently manufactured in commercial quantities, a compact disk is a small disk with, for example, a twelve centimeter outer diameter, on which a plurality of concentric or spiral tracks are formed along one side of the disk. These tracks comprise a multitude of fine grooves whose size corresponds to several micrometers [are] when formed, and represent predetermined digitalized signals such as audio information signals and computer information signals. Each groove is called a pit and the space between the pits are called islands or lands. Generally, the tracks are spirally arranged from the center of the disk and the interval between the tracks is known as a pitch, and this interval or pitch is generally 1.6 μm .

When driving a sled motor for transferring a pickup of the compact disk drive radially across disk, the rotation of the sled motor is controlled using a general frequency generator with a predetermined number of tracks in the disk corresponding to a single pulse generated from the frequency generator. For example, if a compact disk drive is designed such that a constant number of track zero crossing signals are always generated on the basis of a single rotation of the disk, due to manufacturing tolerances encountered during commercial production of the disk, the width of the pitch formed on the disk may vary between 1.4 μm to 1.8 μm , which are smaller and greater than the preferred standard pitch of 1.6 μm , respectively. That is, since the width of the pitch is not uniform, a different number of track zero crossing signals is generated for each disk. In addition, the difference in pitch causes an error in calculations performed during a track searching operation.

Therefore, in order to solve the above problem relating to the error in the above mentioned calculation, conventional compact disk drives adopt a method in which a program area of the disk is divided into twenty-four pages and the search is performed from a current page to an arbitrary page different from the current page, and then a searching error detected from the search process is reflected in the current page to update data of the current page. According to the conventional method, sufficient data updating should be achieved with respect to each current page so as to secure the ensuing correct search. Also, due to the deviation [generated] that occurs when the pickup searches the tracks from the inner circumference to the outer circumference of the disk, or from the outer circumference to the inner circumference of the disk, a microcomputer inner memory of 24(pages) \times 2 \times 2 bytes is used, which I have discovered causes a lower efficiency in usage of the memory. Also, I have found that when the

2

borders of the twenty-four pages of the disk are searched, the result obtained by calculating the track number is not particularly reliable. In addition, I have observed that when measuring the access time in the initial driving state of a compact disk drive, the track number is set on the basis of a test performance of only 100 to 500 access time measurements. Accordingly, since contemporary compact disk drives are not sufficiently stable, accuracy of the track search by the pickup is lowered.

SUMMARY OF THE INVENTION

It is therefore, an object of the present invention to provide an improved compact disk calibration process and apparatus.

It is another object to provide an improved process and an apparatus for locating the track of a circular memory such as a compact disk.

It is yet another object to provide a process and an apparatus for adjusting the calibration of a drive for a circular memory such as a compact disk.

It is still another object to provide a disk calibration process and disk drive, for increasing the [setting] accuracy [of] in setting the track number of a disk and improving efficiency when using a memory by minimizing the error in calculation of the track number when a pickup searches the [disk] disks tracks on the memory in the disk drive.

To achieve these and other objects, there is provided a disk calibration and search process and apparatus for a disk drive, in which, after an initialization step, a pickup is jumped to a first position and moved radially in a predetermined direction in response to pulses generated by a frequency generator. During this radial movement the number of tracks crossed are counted. The counting is continued until a predetermined number of the pulses generated by the frequency generator have been generated. A calculated frequency generator track number is then obtained by dividing the counted number of tracks by the predetermined number of pulses generated by the frequency generator, ie., calculating a unit track number of the disk per a single movement of the pickup, that is, the number of tracks the pickup moves per pulse generated by the frequency generator. The calculated frequency generator track number is stored in memory used to control the frequency generator for jumping the pickup during a search for a target track. An average pitch between the tracks is calculated in accordance with the calculated unit track number; and a moving amount of a drive to jump the pickup from a current position to a target track is then determined.

Also, the disk calibration apparatus and process contemplates performing a searching operation by jumping the pickup from the current position to the target track. Here, the searching operation may be performed by jumping the pickup to a target track to check the track number to the target track, thereby initializing the track number with the checked track number; reading from the track the current location of the pickup on the disk and calculating the number (X) of tracks existing between the current position and the target track, where (X) is the [track] number [(X)] of tracks to be jumped by the pickup; determining whether a long jump [of] by the pick up is required or not; performing a short [jumping of] jump by the pickup and determining whether the pickup jumps to the target track if it is determined in the searching operation that the long jump is not required; adjusting the initialized track numbers to the target track and returning the process to the step of reading the current location of the pickup on the disk if it is determined that the pickup has not jumped to the target

3

track; checking whether the track number to the target track is equal to a value obtained by adding one to the initial value if it has been determined that a long jump is required; dividing the track number (X) to be jumped by the pickup by the initialized track number to the target track, the initialized track number being obtained from the pitch if the track number to the target track is not equal to a value obtained by adding one to the initial value, and moving the driving means of the pickup on the basis of the value obtained; and readjusting the track number by regulating an average pitch if it has been determined that the track number to the target track is equal to a value obtained by adding one to the initial value.

The track number may be re-adjusted by comparing the current jumping direction of the pickup and the previous jumping direction to check whether both jumping directions are the same as each other; dividing the track number (X) to be jumped by the pickup by a reference value and adding the obtained value to the previously accumulated value to provide a first accumulated value if it has been determined that the current and previous jumping directions are the same; determining whether the first accumulated value exceeds the reference value; adjusting the unit track number by adding a predetermined value to the unit track number if the first accumulated value exceeds the reference value; dividing the track number (X) to be jumped by the pickup by the reference value and subtracting the obtained value from the previously accumulated value to provide a second accumulated value if it has been determined that the current jumping direction is not equal to the previous jumping direction; determining whether the second accumulated value is below zero; and adjusting the unit track number by subtracting a predetermined value from the unit track number if the second accumulated value has been determined to be below zero.

BRIEF DESCRIPTION OF THE DRAWINGS

The above object and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

FIG. 1 is a perspective view of an abstract representation of the structure of a commercially available compact disk for a CD-ROM drive;

FIG. 2A is a diagram partially showing the track structure of a compact disk of the type shown in FIG. 1, configured with a standard pitch;

FIG. 2B is a diagram partially showing the track structure of a compact disk of the type shown in FIG. 1, configured with a pitch being smaller than the standard pitch;

FIG. 2C is a diagram partially showing the track structure of a compact disk of the type shown in FIG. 1, configured with a pitch being greater than the standard pitch;

FIG. 3 is a schematic diagram of a mechanism for enabling a CD-ROM drive to perform disk calibration according to the principles of the present invention;

FIG. 4 is a block diagram schematically illustrating a circuit for the CD-ROM drive shown in FIG. 3 constructed according to the principles of the present invention;

FIG. 5 is a flowchart illustrating the steps for performing a first subroutine for adjusting track numbers in the disk calibration process performed according to the principles of the present invention;

FIG. 6 is a flowchart illustrating the steps for performing a search subroutine in the disk calibration process performed according to the principles of the present invention; and

4

FIG. 7 is a flowchart illustrating the steps for performing a second subroutine for adjusting track numbers in the disk calibration process performed according to the principles of the present invention.

DETAILED DESCRIPTION OF THE
INVENTION

Turning now to the drawings, a compact disk 10 is a small disk with, for example, a twelve centimeter outer diameter as shown in FIG. 1, on which a plurality of concentric or spiral tracks 10a are formed. These tracks comprise a multitude of fine grooves [whose size] formed with a size that corresponds to several micrometers [are formed]. These grooves are formed in one side of the compact disk 10 and represent predetermined digitalized signals such as audio information signals and computer information signals. Each groove is called a pit and the space between the pits are called islands or lands. As shown in FIG. 1, tracks 10a are spirally arranged from the center of the disk and the interval between the tracks is known as a pitch, and this interval or pitch is generally 1.6 μm as shown in FIG. 2A.

When driving a sled motor for transferring a pickup of the CD-ROM drive radially across disk 10, the rotation of the sled motor is controlled using a general frequency generator. That is, when designing the CD-ROM drive, a predetermined number of tracks in the disk correspond to a single pulse generated from the frequency generator. For example, the CD-ROM drive is designed such that a constant number of track zero crossing signals are always generated on the basis of a single rotation of the disk. However, due to a problem in the manufacturing of the disk, the width of the pitch formed on the disk may be 1.4 μm or 1.8 μm as shown in FIGS. 2B and 2C, which are smaller and greater than the standard pitch of 1.6 μm , respectively. That is, since the width of the pitch is not uniform, a different number of track zero crossing signals is generated for each disk. In addition, the difference in pitch causes an error in calculations performed during a track searching operation.

Therefore, in order to solve the above problem relating to the error in the above mentioned calculation, the conventional CD-ROM drive adopts a method in which a program area of the disk is divided into twenty-four pages and the search is performed from a current page to an arbitrary page different from the current page, and then a searching error detected from the search process is reflected in the current page to update data of the current page. According to conventional practice however, sufficient data updating should be achieved with respect to each current page so as to secure the ensuing correct search. Also, due to the deviation generated when the pickup searches the tracks from the inner circumference to the outer circumference of the disk, or from the outer circumference to the inner circumference of the disk, a microcomputer inner memory of 24(pages) \times 2 bytes is used, which causes a lower efficiency in usage of the memory. Also, when the borders of the twenty-four pages of the disk are searched, the result obtained by calculating the track number is not reliable. In addition, when measuring the access time in the initial driving state of the CD-ROM drive, the track number is set on the basis of a test performance of only 100 to 500 access time measurements. Accordingly, since the CD-ROM drive is not operating under a sufficiently stable condition, accuracy on the track search by the pickup is lowered.

Shown in FIG. 3, is a CD-ROM disk drive system having a frequency generator 12 for generating a pulse used to detect an amount of rotation of a sled motor 11 installed at

5

the end of a shaft of sled motor 11, and an optical sensor 13 for detecting the rotation of frequency generator 12 is installed adjacent frequency generator 12. Optical sensor 13 detects the pulse generated from frequency generator 12 in accordance with the rotation of sled motor 11. Here, the CD-ROM drive is designed so that frequency generator 12 generates 20 pulses and a pickup 14 jumps 480 tracks on a disk 16, during a single rotation of the sled motor 11. The current jumping amount of the pickup 14 is calculated on the basis of the number of pulses generated from the frequency generator 12 while the tracks are being searched by the pickup 14. Disk 16 is rotated by spindle motor 15. Also, reference numerals 17 and 18 represent gears engaged to each other in accordance with the rotation of sled motor 11, and reference numeral 19 is a sled with a rack structure, which reciprocates pickup 14 in accordance with the rotation of gears 17 and 18.

Also, as shown in FIG. 4, the CD-ROM disk drive system includes a microprocessor 41 for controlling the whole system, a short-jump controller 42 for controlling a short jump of pickup 14 in accordance with a control command from microprocessor 41, and a program memory 43 for storing various data used for reproducing information from disk 16.

Next, the disk calibration and search operation of the present invention, performed by the above CD-ROM disk drive system, will be described with reference to FIGS. 5, 6 and 7.

FIG. 5 is a flowchart depicting a first subroutine performed by microprocessor 41 for disk calibration. When a disk is replaced by a new disk or the CD-ROM drive is reset, the CD-ROM drive initializes itself, step 51. Here, the term "initialization" means a chain of processes for starting such operations as focusing, tracking, and motor servo control. After initialization is completed, pickup 14 of the disk drive jumps to an inner circumference of the disk, that is, to a predetermined initial position, step 52, such as the track lead-in area. Then, while pickup 14 of the disk drive jumps towards the outer circumference of the disk, step 53, a counter (not shown) installed in microprocessor 41 counts, step 54, the number of pulses generated from frequency generator 12 in accordance with the rotation of sled motor 11. Here, the track number can be counted by counting the pulse number. It should be noted, however, that the counting operation is delayed for a predetermined period (e.g., 500 μ sec), in order to stabilize the pickup 14 after the initial jump in step 52. Also, since the pulse is counted on the basis of the edge of the pulse, it is checked, step 55, whether the starting point of the pulse counting is the edge of the pulse, prior to the actual counting of the number of pulses generated from the frequency generator 12. When the starting point of the pulse counting is not the edge of the pulse, the counter existing in the microprocessor 41 continuously checks whether the starting point is the edge of the pulse. When the starting point is the edge of the pulse, it is checked whether a track is detected by pickup 14, step 56. When a track is not detected by pickup 14, microprocessor 41 continuously checks pickup 14 for the detection of a track.

For each track detected by pickup 14, a counter accumulatively sums the number of the tracks detected, step 57. Thereafter, it is checked whether the pulse number counted by the counter of the microprocessor 41 is equal to or greater than 160, step 58. Here, the number 160 was determined based on the data which is obtained through 8 full rotations of the disk during all experimental procedures using the CD-ROM drive system designed so that frequency generator 12 generates 20 pulses per one rotation of the disk. If the

6

pulse number is not equal to or greater than 160 in step 58, the processes are repeated from step 56. Otherwise, when the pulse number is equal to or greater than 160, a [frequency generator] unit track number (Z) is calculated by dividing the summed track number by 160, step 59, i.e., microprocessor 41 calculates [a] the unit track number (Z) of the disk per a single movement of pickup 14, that is, the number of tracks the pickup moves per pulse generated by the frequency generator. The calculated unit track number (Z) is stored (set) in program memory 43, step 60, and the process returns to a root program in microprocessor 41 in order to perform another routine. Microprocessor 41 also calculates an average pitch between the tracks in accordance with the calculated unit track number (Z).

Through the above chain of steps, the initial disk calibration operation is completed. Then, on the basis of the unit track number (Z) stored in the program memory 43, a number of tracks to be jumped by the pickup 14 for performing a search operation is converted into a pulse number to be generated by frequency generator 12 during program performance.

Referring now to FIG. 6, a search subroutine for jumping the pickup to a target track from a current position is performed in the disk drive on the basis of the [frequency generator] unit track number (Z) set as described above. First, microprocessor 41 controls pickup 14 to jump to the target track using the [frequency generator] unit track number Z as data, so as to initialize the unit track number [to] for the target track. Here, if an error is generated during this jumping process, where the [frequency generator] unit track number (Z) is not equal to the unit track number [to] for the target track, the search operation is repeatedly performed to adjust the unit track number [to] for the target track, thereby initializing the adjusted unit track number, step 61.

Next, the current location of pickup 14 on disk 16 is read out and the distance from the read out current position to the target track is calculated, step 62. After the distance calculation, [a] the number of tracks (X) to be jumped by pickup 14 is calculated, step 63, and then it is determined whether a long jump is required or not, step 64. The determination of whether a long jump is required is based on the number of tracks (X) to be jumped. If the long jump is not required, pickup 14 performs a short jump, step 65. A short jump is a jump of a predetermined number of tracks. Then, it is checked in step 66 whether the intended target track was reached by the short jump. If the short jump does not reach to the target track, a value, such as one, is added to the initial track number to the target track, i.e., the initial value of the number of tracks (X) to be jumped, step 66, and then the process returns to the step 62. If the short jump reaches the target track, the process returns to the root program in microprocessor 41.

On the other hand, if it is determined in the step 64 that the long search is required, a check is made to determine whether the track number to the target track is equal to a value obtained by adding one to the initial value of the number of tracks (X) to be jumped, step 68. If the track number is not equal to the value obtained by adding one to the initial value, the [track] number of tracks (X) to be jumped by the pickup is divided by the [initial] unit track number [to] for the target track, step 69 to obtain a value (Y). Then, in step 70, the sled motor 11 is rotated in accordance with a pulse number converted from the value (Y) obtained in the step 69, and then the process proceeds to step 66 discussed above.

On the other hand, when it is determined in step 68 that the track number to the target track is equal to the value obtained by adding one to the initial value, a second subroutine for adjusting the track number is performed, step 71,

7

and then the process proceeds to step 69 discussed above. Here, this second subroutine for adjusting the track number is for compensating a search error generated during the search subroutine performance due to a defect of the disk.

The process of this second subroutine for adjusting the track number will be described with reference to FIG. 7. First, the current jumping direction and the previous jumping direction are compared (step 81). Then, it is checked whether the current jumping direction is the same as the previous jumping direction (step 82). If the current jumping direction is the same as the previous jumping direction, a value (U) is obtained by dividing the track number (X) to be jumped by the pickup 14 by 100. Here, the numeral "100" is arbitrarily set for the convenience of calibration with regard of 300-400 error tracks. The value (U) is added to a value (P) obtained by accumulatively summing the values (U) to set a new value (P) (step 83). Then, it is determined that the newly set value (P) is over 100 (step 84). If the newly set value (P) is over 100, a value obtained by adding one to the frequency generator track number (Z) is set as a new frequency generator track number (Z) and the value (P) is set as zero. This adjusted frequency generator track number is stored in the microprocessor 41. Otherwise, if it is determined in the step 84 that the value (P) is not over 100, the process returns to the root program.

On the other hand, if it is determined in the step 82 that the current jumping direction is not equal to the previous jumping direction, a value (U) is obtained by dividing the track number (X) to be jumped by the pickup 14 by 100 and the value (U) is subtracted from the value (P) to set a new value (P) (step 86). Then, it is determined whether the newly set value (P) is below zero (step 87). If the newly set value (P) is not below zero, the process returns to the root program. Otherwise, if the newly set value (P) is below zero, a value obtained by subtracting one from the frequency generator track number (Z) is set as a new frequency generator track number (Z) and the value (P) is set as 100 (step 88).

As described above, in the disk calibration method in the disk drive according to the present invention, the track number of each disk inserted into the disk drive is adjusted at the initial state in accordance with the number of pulses generated from the frequency generator, thereby improving accuracy in the disk calibration. Also, the error generated during the searching operation of the pickup is compensated through a simple process. Furthermore, since less internal memory is used for performing the above calibration process, the memory efficiency is increased.

What is claimed is:

✓ 1. A disk calibration and search method in a disk drive, comprising the steps of:

positioning a data reading pickup across to a first position on a disk;

jumping said pickup in a predetermined direction across tracks on said disk;

counting the number of tracks detected during said jumping step;

calculating a unit track number of the disk per a single movement of a driving means for jumping the pickup and calculating an average pitch between the tracks in accordance with the calculated unit track number; and determining a moving amount for controlling the driving means to jump the pickup from a current position to a target track.

2. A disk calibration and search method as set forth in claim 1, further comprising a step of delaying said step of counting for a predetermined initial period to stabilize said pickup.

3. A disk calibration and search method as set forth in claim 1, further comprising a step of performing a searching operation by jumping the pickup from the current position to the target track.

4. A disk calibration and search method as set forth in claim 3, said step of performing the searching operation comprises the steps of:

jumping said pickup to a target track to check the track number to the target track, thereby initializing the track number with the checked track number to obtain an initial value;

reading out the current location of the pickup on the disk and calculating a number of tracks (X) necessary to jump said pickup from said current position and said target track;

determining, on the basis of said number of tracks (X), whether a long jump is required to move said pickup to said target track;

performing a short jump for moving said pickup towards said target track when it is determined that said long jump is not required;

determining whether said pickup reached said target track after said short jump;

adjusting said initial value by adding one to said initial and returning the process to said step reading out the current location of said pickup when said pickup does not reach said target track after said short jump;

checking whether the number of tracks (X) to the target track is equal to a value obtained by adding one to the initial value when said long jump is required;

dividing said number of tracks (X) to be jumped by the pickup by said initial value, when said number of tracks (X) to the target track is not equal to a value obtained by adding one to said initial value;

moving the driving means of the pickup on the basis of a value obtained by said dividing step; and

re-adjusting the track number by regulating said average pitch when said number of tracks (X) to the target track is equal to a value obtained by adding one to the initial value.

5. A disk calibration and search method as set forth in claim 4, said re-adjusting step comprising the steps of:

determining whether a current jumping direction of said pickup is equal to a previous jumping direction of said pickup;

dividing the number of tracks (X) to be jumped by the pickup by a reference value and adding the obtained value to a previously accumulated value to provide a first accumulated value when it is determined that the current jumping direction is equal to said previous jumping direction;

determining whether said first accumulated value is greater than said reference value;

adjusting said unit track number by adding a predetermined value to said unit track number when said first accumulated value is greater than said reference value and resetting said first accumulated value to zero;

dividing said number of tracks (X) to be jumped by the pickup by said reference value and subtracting the obtained value from the previously accumulated value to provide a second accumulated value said current jumping direction is not equal to said previous jumping direction;

determining whether said second accumulated value is less than zero; and

adjusting said unit track number by subtracting said predetermined value from said unit track number when said second accumulated value is less than zero.

6. A disk calibration and search method for a disk drive having a disk mounted therein, a frequency generator for generating a pulse used to detect an amount of rotation of a sled motor installed at an end of a shaft of a sled motor, an optical sensor installed adjacent said frequency generator for detecting rotation of said frequency generator, a pickup for reading data and detecting tracks on said disk, said disk being rotated by a spindle motor, drive means for moving said pickup, a microprocessor for controlling said disk drive, a short-jump controller for controlling a short jump of said pickup in accordance with a short jump control command from said microprocessor, and a program memory for storing various data used for reproducing information from said disk, said method comprising steps of:

jumping said pickup to a first position on said disk;

jumping said pickup from said first position towards a second position on said disk;

counting tracks detected by said pickup when jumping towards said second position;

counting pulses generated by said frequency generating means while jumping said pickup towards said second direction to obtain a summed track number;

stopping said step of counting tracks when said step of counting pulses counts a predetermined number of pulses;

dividing said summed track number by said predetermined number of pulses to obtain a frequency generator track number;

storing said frequency generator track number in said program memory; and

searching for a target track on the basis of said stored frequency generator track number.

7. The method as set forth in claim 6, further comprising a step of delaying said step of counting pulses by a predetermined delay period.

8. The method as set forth in claim 6, further comprising a step of starting said step of counting pulses when an edge of said pulse is detected.

9. The method as set forth in claim 6, said step of searching for a target track comprising steps of:

generating an initial value representing an initial number of tracks to said target track;

reading out a current position of said pickup;

calculating a distance from said current position to said target track;

determine a number of tracks to be jumped by said pickup to move said pickup to said target track in response to said calculated distance;

determining whether a long jump is required to move said pickup to said target track;

determining whether said number of tracks to be jumped to said target track is equal to a predetermined value added to said initial value;

dividing said number of tracks to be jumped by said initial value when said number of tracks to be jumped to said target track is not equal to said predetermined value added to said initial value;

converting the result obtained by said dividing step to a pulse number; and

rotating said sled motor in response with said pulse number.

10. The method as set forth in claim 9, further comprising steps of

controlling said short-jump controller to jump said pickup a short jump towards said target track when said long jump is not required;

determine whether said pickup has reached said target track after said rotating step and after said controlling step;

adding said predetermined value to said initial track number and returning to said step of reading out a current position of said pickup when it is determined that said pickup has not reached said target track; and returning to a root program of said microprocessor when said pickup has reached said target track.

11. The method as set forth in claim 9, further comprising a step of:

adjusting said number of tracks to said target track when said number of tracks to be jumped to said target track is equal to said predetermined value added to said initial value.

12. The method as set forth in claim 11, said adjusting step comprising steps of:

- comparing a current jumping direction with a just previous jumping direction;
- determining whether said current jumping direction is the same as said just previous jumping direction;
- dividing said number of tracks to be jumped by a reference value and adding the obtained value to a previously accumulated value to provide a first accumulated value when it is determined that the current jumping direction is the same as said just previous jumping direction;
- determining whether said first accumulated value is greater than said reference value; and
- adjusting said number of tracks to said target track by adding said predetermined value to said number of tracks to said target track when said first accumulated value is greater than said reference value and resetting said first accumulated value to zero.

13. The method as set forth in claim 12, further comprising steps of:

- dividing said number of tracks to said target track to be jumped by the pickup by said reference value and subtracting the obtained value from the previously accumulated value to provide a second accumulated value when said current jumping direction is not the same as said just previous jumping direction;
- determining whether said second accumulated value is less than zero; and
- adjusting said number of tracks to said target track by subtracting said predetermined value from said number of tracks to said target track when said second accumulated value is less than zero.

14. The method as set forth in claim 6, said step of jumping said pickup to a first position comprises jumping said pickup to an inner circumference of said disk.

15. The method as set forth in claim 14, said step of jumping said pickup towards said second position comprises jumping said pickup to an outer circumference of said disk.

16. The method as set forth in claim 6, said first position comprising a lead in area of said disk, said second position comprising a lead out area of said disk.

17. The method as set forth in claim 8, further comprising a step of determining when said pickup detects a track when said edge of said pulse is detected.

1 ✓ 18. A method in a disk drive, comprising the steps of:
2 activating a motor moving a data reading pickup from a first track to a second track for a
3 period of time;
4 counting a first number of tracks during moving of said data reading pickup; and
5 determining a unit track number by dividing said number of tracks by said period of time.

1 19. The method of claim 18, wherein said unit track number represents a track pitch.

2 20. The method of claim 18, wherein said unit track number represents an average track
3 pitch of said tracks.

4 21. The method of claim 18, further comprising the step of storing said unit track number
5 in a memory.

1 22. The method of claim 18, further comprising the steps of:
2 detecting the number of pulses generated from said motor, the number of pulses representing
3 said period of time; and
4 determining said unit track number by dividing said first number of tracks by said number of
5 pulses.

1 23. The method of claim 22, wherein said unit track number represents an average track
2 of said tracks.

1 24. The method of claim 22, further comprising the steps of:
2 rotating a disk while said data reading pickup is moving;
3 providing said motor moving said data reading pickup in a rate of a predetermined distance
4 per each rotation of said disk during said period of time; and
5 generating said number of pulses in response to all of each predetermined distance.

1 25. The method of claim 22, further comprising the steps of:
2 rotating a disk while said data reading pickup is moving; and
3 detecting said number of pulses generated from said motor in response to movement of said
4 data read pickup, said number of pulses representing the number of rotation of said disk.

1 26. The method of claim 22, further comprising the steps of:
2 determining a second number of tracks between a current track and a target track;
3 determining a second number of pulses by dividing said first amount by said unit track
4 number; and
5 activating said motor to move said data reading pickup in accordance with said second
6 number of pulses.

1 27. The method of claim 22, further comprising the steps of:

2 storing said unit track number in a memory;

3 determining a second number of tracks between a current track and a target track;

4 determining a second number of pulses by dividing said first amount by said unit track

5 number; and

6 activating said motor to move said data reading pickup in accordance with said second

7 number of pulses.

1 28. The method of claim 22, further comprising of the steps of:

2 storing said unit track number in a memory;

3 determining a second number of tracks between a current track and a target track;

4 determining a second unit track number in dependence upon said first number of tracks and
5 said second number of tracks

6 determining a second number of pulses by dividing said second number of tracks by said
7 second unit track number; and

8 activating said motor to move said data reading pickup in accordance with said second
9 number of pulses.

1 29. The method of claim 22, further comprising of the step of storing said second track

2 number in said memory.

1 30. A disk calibration and search method in a disk drive, comprising the steps of:
2 positioning a data reading pickup across to a first position on a disk;
3 jumping said pickup in a predetermined direction across tracks on said disk;
4 counting the number of tracks detected during said jumping step;
5 calculating a unit track number of the disk per a single movement of a driving means for
6 jumping the pickup; and
7 determining a moving amount for controlling the driving means to jump the pickup from a
8 current position to a target track.

[57]

ABSTRACT

A disk calibration and search method in a disk drive is provided, in which, after an initialization step, a pickup is jumped to a first position and moved radially in a predetermined direction in response to pulses generated by a frequency generator. During this radial movement the number of tracks crossed are counted. The counting is continued until a predetermined number of the pulses generated by the frequency generator have been generated. A calculated frequency generator track number is then obtained by dividing the counted number of tracks by the predetermined number of pulses generated by the frequency generator, i.e., calculating a unit track number of the disk per a single movement of the pickup, that is, the number of tracks the pickup moves per pulse generated by the frequency generator. The calculated frequency generator track number is stored in memory used to control the frequency generator for jumping the pickup during a search for a target track. An average pitch between the tracks is calculated in accordance with the calculated unit track number; and a moving amount for a drive to jump the pickup from a current position to a target track is then determined. The calibration and search methods will be described in greater detail below.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: KI-BONG YUN

Original Patent No. 5,808,982 issued on 15 September 1998

Serial No.: *to be assigned*

Examiner: *to be assigned*

Filed: 15 September 2000

Art Unit: *to be assigned*

For: DISK CALIBRATION AND SEARCH METHOD IN A CD-ROM DRIVE
SYSTEM


REQUEST FOR APPROVAL OF DRAWING CHANGE(S)

Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

Approval of the drawing changes to original Figs. 5 and 7 as shown in red, cancellation of original Fig. 6, and substitution of new Fig. 6 for the aforesaid cancelled original Fig. 6, is respectfully requested.

Respectfully submitted,


Robert E. Bushnell
Attorney for Applicant
Reg. No.: 27,774

1522 "K" Street, N.W., Suite 300
Washington, D.C. 20005
Area Code: 202-638-5740

Folio: P56169RE
Date: 15 September 2000
I.D.: REB/kf

FIG. 1
PRIOR ART

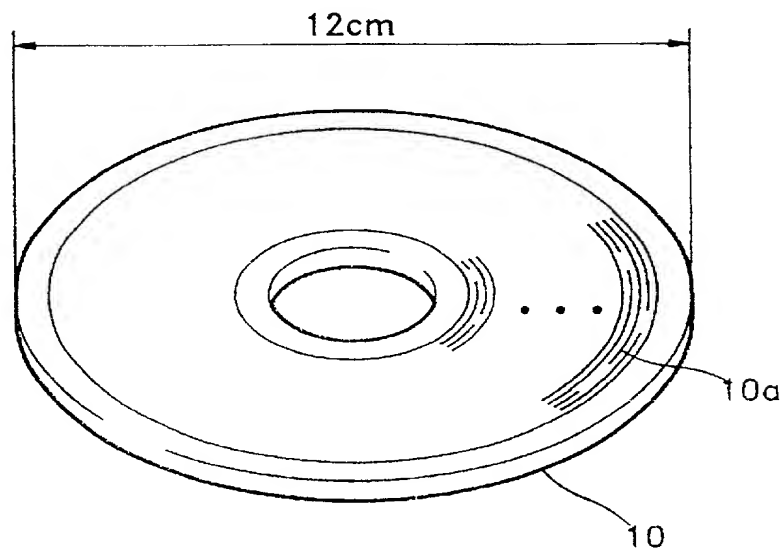


FIG. 2A

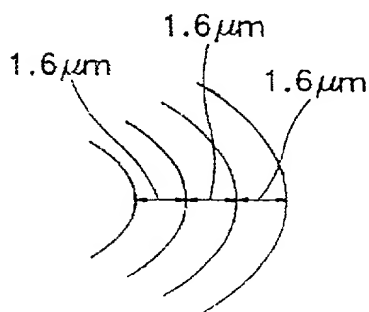


FIG. 2B




FIG. 2C

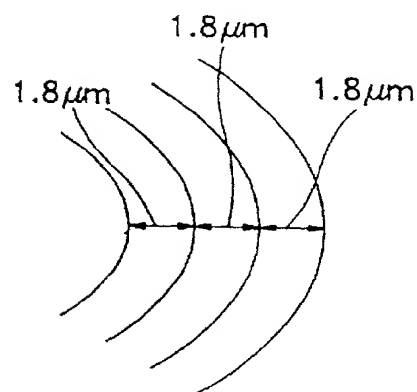


FIG. 3

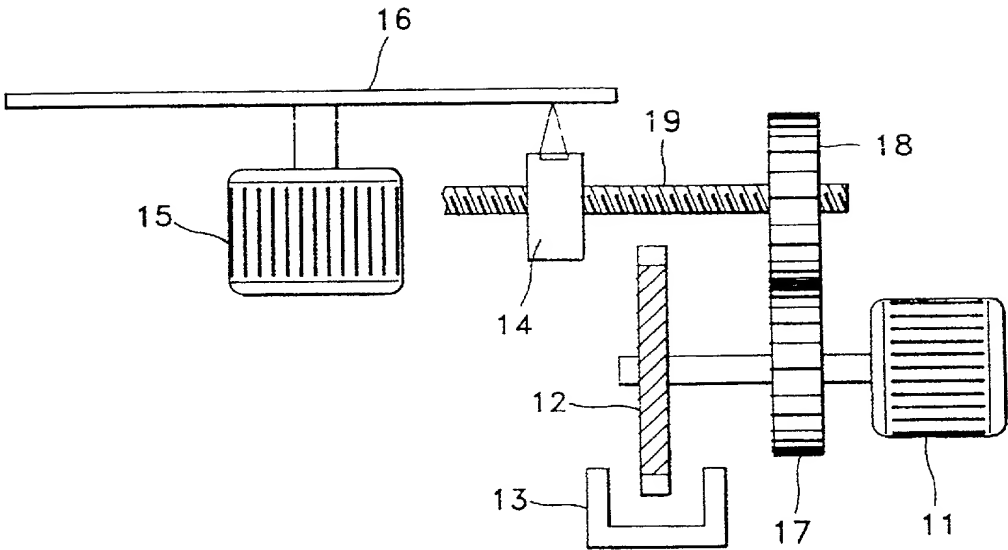


FIG. 4



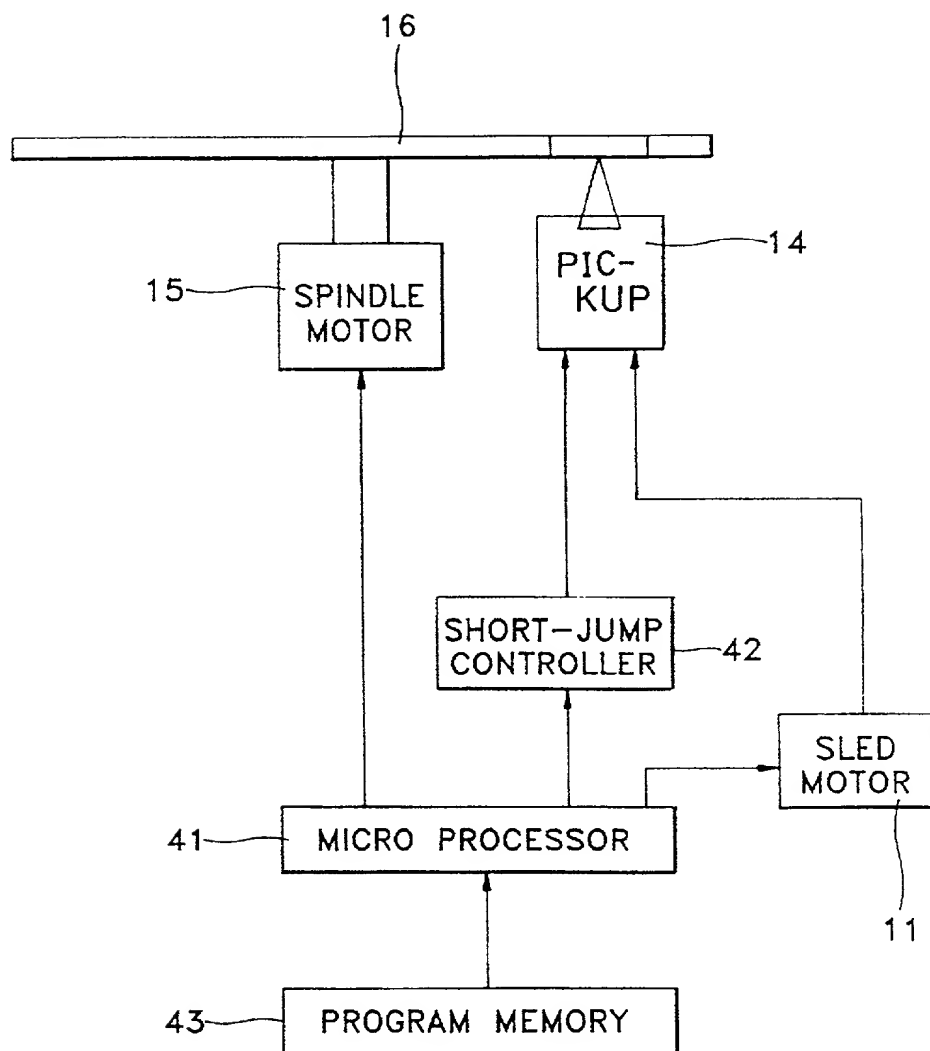


FIG. 5

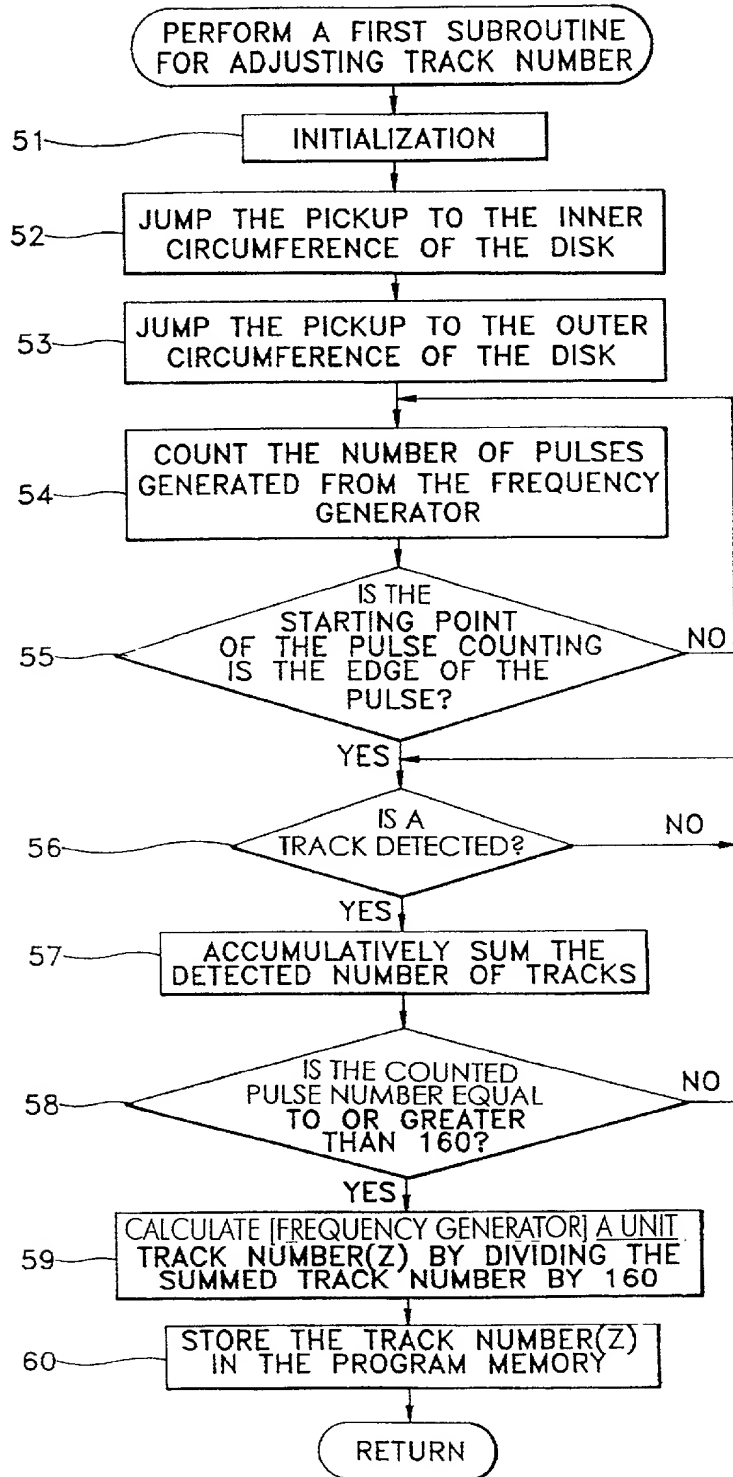

(Amended)

FIG. 6

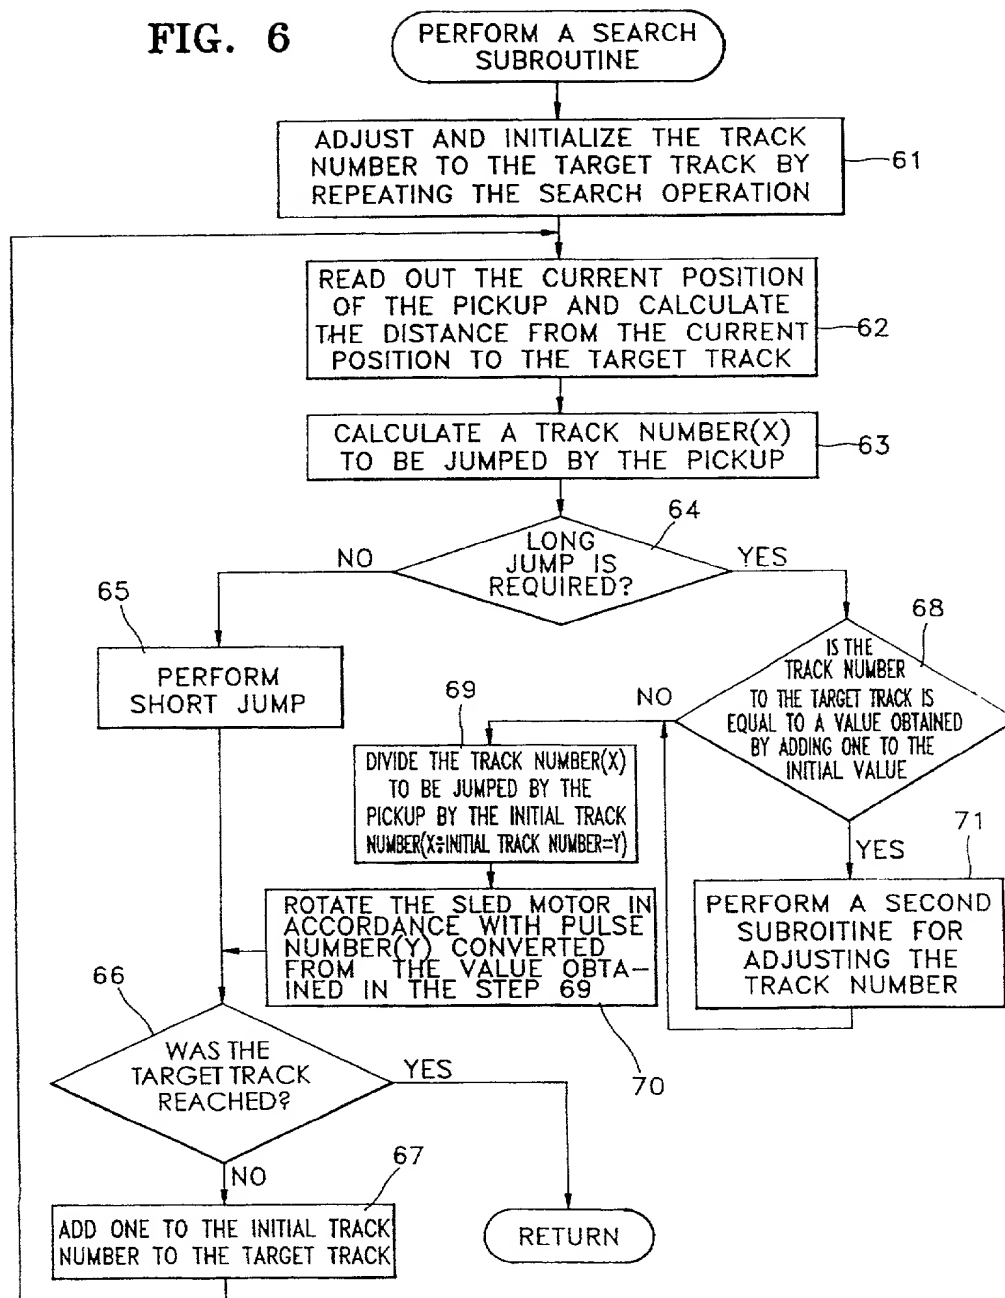

CANCELED


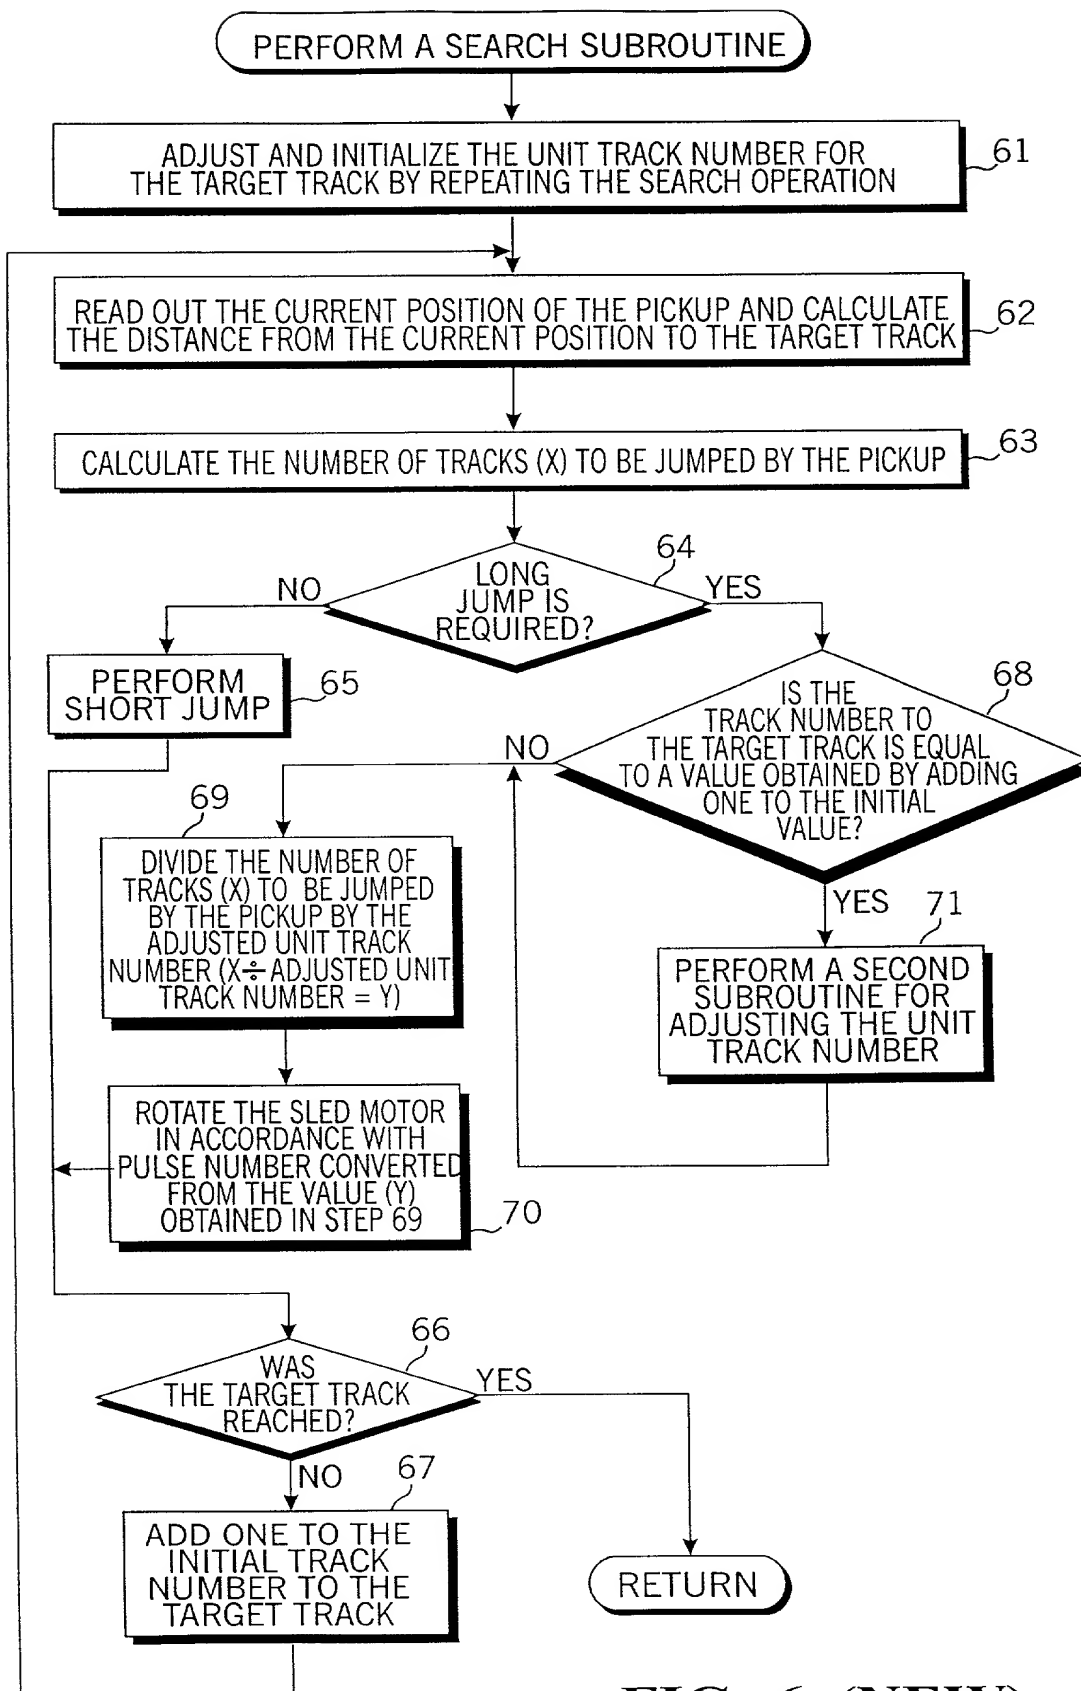


FIG. 6 (NEW)

FIG. 7

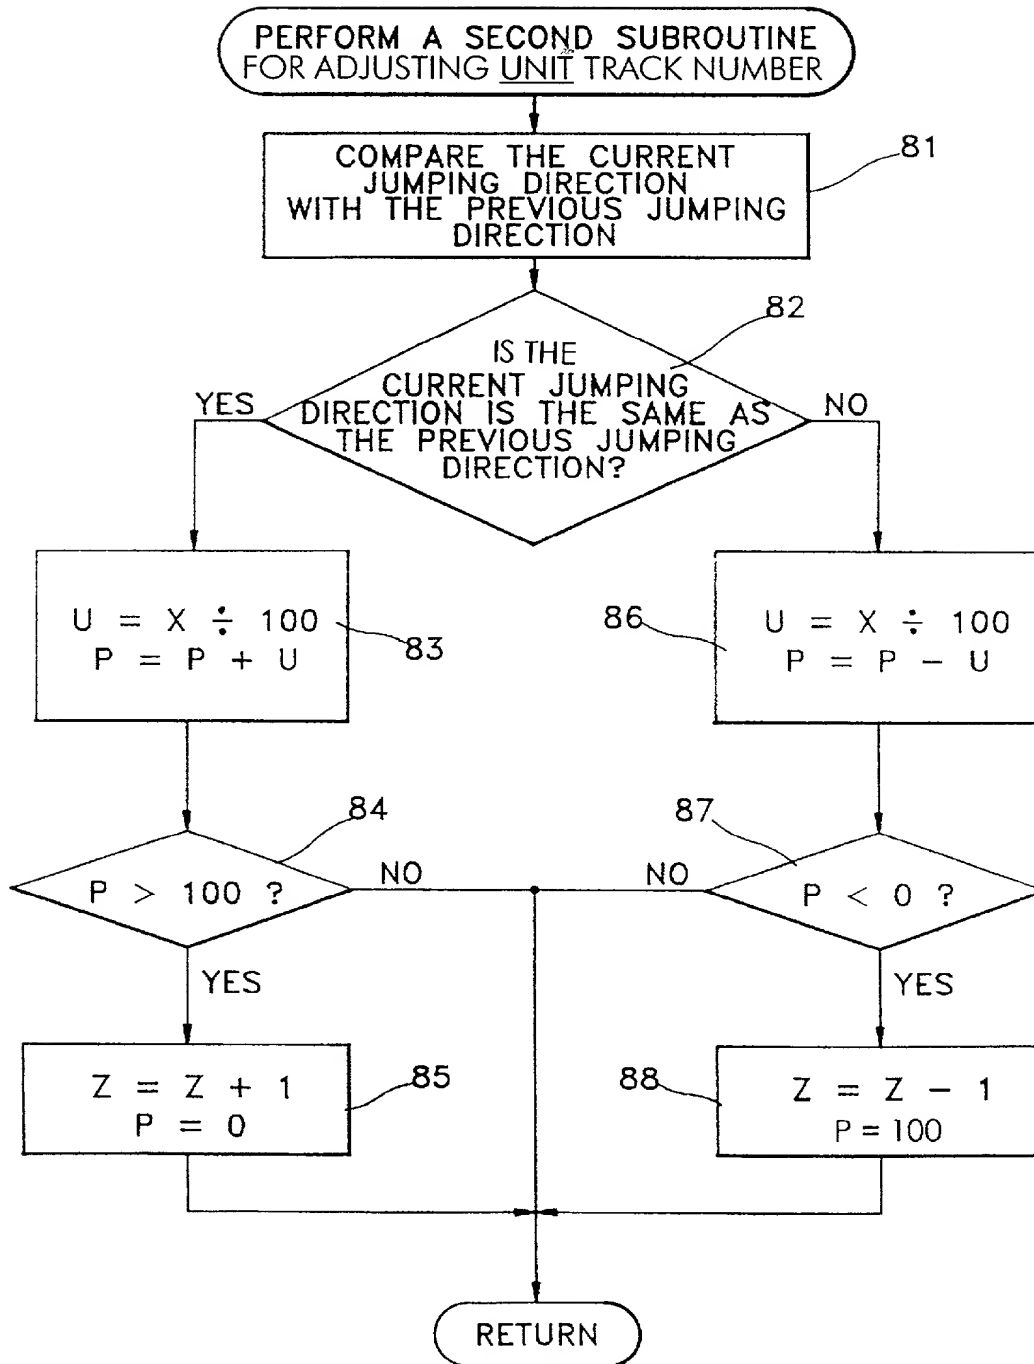

(Amended)

REISSUE APPLICATION DECLARATION BY THE INVENTORDocket Number (Optional)
P56169RE

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is described and claimed in patent number 5,808,982, granted on 15 September 1998, and for which a reissue patent is sought on the invention entitled *DISK CALIBRATION AND SEARCH METHOD IN A CD-ROM DRIVE SYSTEM*.

the specification of which

☒ is attached hereto.

☐ was filed on _____ As reissue application number ____/____

And was amended on _____

(If applicable)

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I verily believe the original patent to be wholly or partly inoperative or invalid, for the reasons described below. (Check all boxes that apply.)

☒ by reason of a defective specification or drawings.

☒ by reason of the patentee claiming more or less than he had the right to claim in the patent.

☒ by reason of other errors.

At least one error upon which reissue is based is described as follows:

The allowed process claims 1 and 6 are too narrow, and include, by way of an example of the scope of these process claim, the "positioning of a data reading pickup across to a first position on a track" in claim 1, and "jumping said pickup to a first position on said disk" in claim 6. The Applicant and the Assignee desire to secure broader coverage with, by way of example, newly presented independent claim 18.

Claims 1 through 17 of the original patent include no apparatus claims.

Dependent process claim 9 is grammatically incorrect due to the omission of the article "and" in line 63.

DocId: 34262822
P56169RE

Name(s): Robert E. Bushnell

Correspondence Address: Direct all communication about the application to:

Type Customer Number Here

**Place Customer Number,
Bar Code Label Here**

OR

☐ Firm or Individual Name

ROBERT E. BUSHNELL and Lew Fling

Address *

1522 K Street, N.W., Suite 300,

City

Washington

State

D.C.

24

20005-1202

Country

USA

Telefonans

(202) 408-9040

Fax

(202) 628-0755

Thereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine and imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this declaration is directed.

Full name of gold or first inventor (given name, family name)

KI-BONG YUN

Investor's signature _____

Ki - Bong Yun

Residence: 153-3, Anyang 2-dong, Maeng-gu, Anyang-city, Kyungki-do,
Republic of Korea

DATA

15 September 2000

Post Office Address: Anyang-city, Kyunggi-do, Republic of Korea

Chlorophyll

Republic of Korea

Full name of sole or first inventor (Given name, family name)

Inventor's Signature _____

Keywords: *workplace spirituality, organizational commitment, organizational trust, organizational identification, organizational citizenship behaviors*

Date _____

Post Office Address

Citizenship

☐ Additional joint inventories are named on separately numbered sheets attached hereto.

REISSUE APPLICATION DECLARATION BY THE ASSIGNEEDocket Number (optional)
P56169RE

I hereby declare that:

My residence and post office address and citizenship are stated below next to my name.

I am authorized to act on behalf of the following assignee: SAMSUNG ELECTRONICS CO., LTD.and the title of my position with said assignee is: President

The entire title to the patent identified below is vested in said assignee.

Name of Patentee(s): **KI-BONG YUN**Patent Number: **5,808,982**Date of Patent Issued **15 September 1998**Title of Invention: **DISK CALIBRATION AND SEARCH METHOD IN A CD-ROM DRIVE SYSTEM**I believe said patentee(s) to be the original, first and sole/joint inventor(s) of the subject matter which is described and claimed in said patent, for which a reissue patent is sought on the invention entitled DISK CALIBRATION AND SEARCH METHOD IN A CD-ROM DRIVE SYSTEM.

the specification of which

☒ is attached hereto.☐ was filed on _____ As reissue application number ____ / _____
and was amended on _____

(If applicable)

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I verily believe the original patent to be wholly or partly inoperative or invalid, for the reasons described below.
(Check all boxes that apply.)☒ by reason of a defective specification or drawings.☒ by reason of the patentee claiming more or less than he had the right to claim in the patent.☒ by reason of other errors.

At least one error upon which reissue is based is described as follows:


The allowed process claims 1 and 6 are too narrow, and include, by way of an example of the scope of these process claim, the "positioning of a data reading pickup across to a first position on a track" in claim 1, and "jumping said pickup to a first position on said disk" in claim 6. The Applicant and the Assignee desire to secure broader coverage with, by way of example, newly presented independent claim 18.

Claims 1 through 17 of the original patent include no apparatus claims.

Dependent process claim 9 is grammatically incorrect due to the omission of the article "and" in line 63.

[Attach additional sheets, if needed]

[Page 1 of 2]

(REISSUE APPLICATION DECLARATION BY THE ASSIGNEE, page 2)		Docket Number (optional) P56169RE	
All errors corrected by this reissue application arose without any deceptive intent on the part of the Applicant.			
I offer to surrender the original grant of the patent, but that patent is lost or has become unavailable.			
I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.			
Name(s) Robert E. Bushnell		Registration Number 27,774	
Correspondence Address: Direct all communications about the application to:			
<input type="checkbox"/> Customer Number		→ Place Customer Number Bar Code Label Here	
OR		Type Customer Number Here	
<input checked="" type="checkbox"/> Firm or Individual Name	ROBERT E. BUSHNELL and Law Firm		
Address	1522 K Street, N.W., Suite 300,		
City	Washington	State	D.C.
Country	U.S.A.		
Telephone	(202) 408-9040		
<p>The undersigned officer of the Assignee, is duly authorized to make this Declaration, and has examined the documents of title, and determined that Samsung Electronics Co., Ltd., the assignee of U.S. Patent No. 5,808,982 by virtue of an Assignment from all inventors recorded in the U.S. Patent & Trademark Office at Reel No. 8142, at Frame No. 0378 on the 12th day of August 1996, consents to the filing of this reissue application for the reissue of U.S. Patent No. 5,808,982.</p> <p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine and imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this declaration is directed.</p>			
Full name of person signing (given name, family name)		JONG-YONG YUN	
Signature 		Date 15 September 2000	
Address of Assignee 416 Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do, Republic of KOREA			
Patentee KI-BONG YUN		Citizenship Rep. of Korea	
Residence/Post Office Address 853-3, Anyang 2-dong, Manan-gu, Anyang-city, Kyungki-do		Rep. of Korea	
Patentee		Citizenship	
Residence/Post Office Address			